



APPLICATIONS	Heating, Cooling, Steam applications	
MAX. FLOW RATE	15 m ³ /h (with water)	
MAX. NUMBER OF PLATES	75	
FRAME	PN10, PN16, PN25 (standard PN10)	
MATERIALS	FRAME	Painted carbon steel AISI 304 – 316 Stainless steel
	PLATES	AISI 304 – 316 Stainless steel titanium, incoloy, monel, hastelloy, copper
	GASKETS	NBR, EPDM, EPM, FKM, Silicone
	CONNECTIONS	Carbon steel, stainless steel

DIMENSIONS

NOMINAL PRESSURE	PN10	PN16	PN25
A	200	200	200
B	86	86	86
C	490	490	490
D	385	385	385
F	N° of plates x 2,5	N° of plates x 2,5	N° of plates x 2,5
G	1 ¼"	1 ¼"	1 ¼"
S1 / S2	12 / 12	15 / 15	20 / 20
Plate surface (m ²)	0,05	0,05	0,05
Vol. of channel (l)	0,085	0,085	0,085
Weight of plate (Kg)	0,4	0,4	0,4
Plate thickness (mm)	0,5	0,5	0,5
Weight of frame (Kg)	22	27	35
Clamping bolts	N°8 M12	N°8 M16	N°8 M16

N°OF PLATES	15	21	27	39	51	63
E	90	115	140	190	240	290

DIMENSIONS

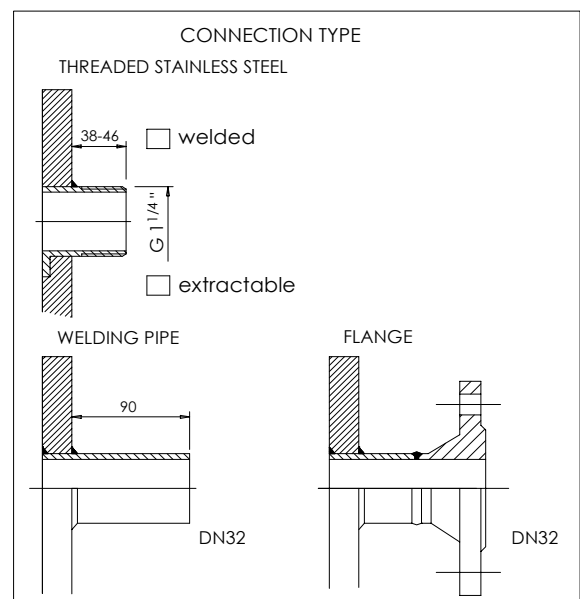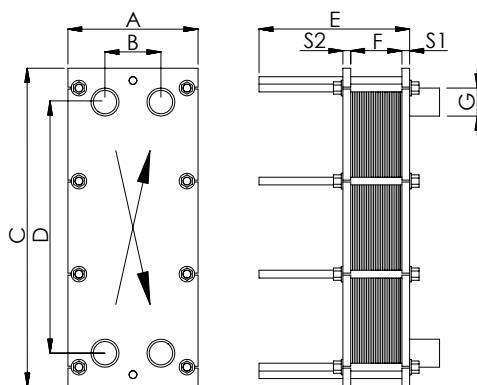

are available the support legs too